

Operation

When setting up the system the handsets can be split into two groups. Intercommunication can only occur between these groups.

When the call button(s) at an entry panel is pressed it will ring the handset(s) linked to the specific handset group.

The entry panel call buttons can be configured as:

• **1-Button entry panel:**

Top button (A) and bottom button (B) rings all handsets in the system

• **2-Button entry panel:**

Top button (A) rings group "A" handsets

Bottom button (B) rings group "B" handsets

The factory default is a 2-button entry panel.




NB: In a system with 2 entry panels, a V2 entry panel will only work with a V3 entry panel **that has been configured for 2-button operation, not 1-button operation.** V3 entry panels are compatible in either 1- or 2- button mode.

In an installation with two entry panels the call tone will be different for each entry panel. There will be a simultaneous ring at the entry panel to confirm the ringing at the handset(s).

When lifting the handset, voice communication can take place between the entry panel and the handset. If any of the other handsets in the system are picked up while this communication is taking place, there will be common communication with these handsets.

A dedicated call button is provided on the handset to call the other group of handsets. Any handset in one group will ring all the handsets in the other group. The ring tone is different to that generated when being called from the entry panels to that the user can identify that it is an internal call. If communication is taking place between handsets the entry panels are automatically disconnected to ensure privacy of internal communication.

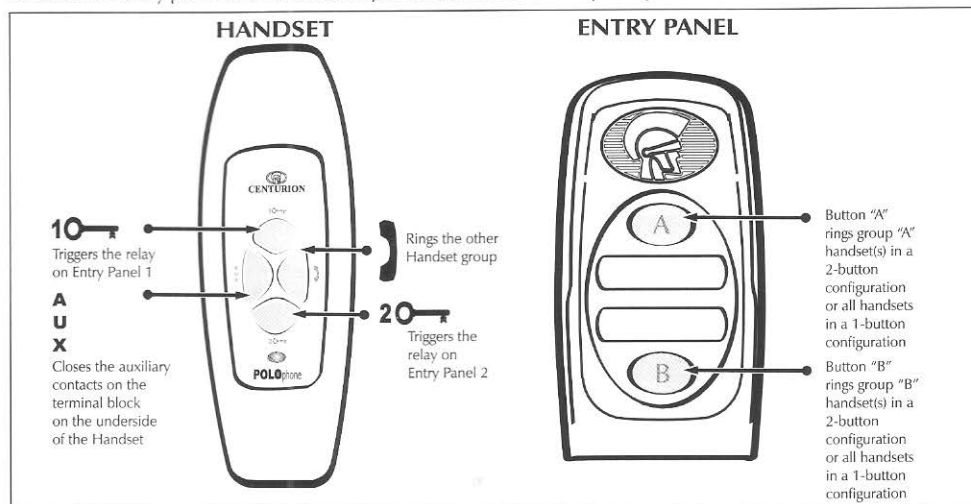

SPECIFICATIONS






Operating Voltage	12-14V DC (14V DC if powering handset) Supplied from gate motor DC supply* or separate 14V DC supply
Current draw	Quiescent Maximum
	150mA (+/- 60mA for a 1:1 system) 200mA
Speech volume	Adjustable at each entry panel and handset
Wiring / Cabling	2 polarized wires for speech, call and gate/door lock release
Ring tone	Electronic while button is depressed, with separate tones when calling from each entry panel in a system or between groups of handsets
Call confirmation at entry panel	Yes
Wiring / Cabling distance	Max 150m - Refer to cable thickness on page 5
Gate / Door release	2A 12V AC/DC Potential free normally open contact at entry panel. Door lock requires separate power supply wired in series with contact
Handset auxiliary contact	Potential free normally open contact. Requires separate wiring to 2 wire bus. Contact rating: 2A @ 12V DC/AC
Handset indicator lens	LED terminals on PCB 470Ohm in-line resistor. Requires separate wiring to 2 wire bus.
Entry panel illumination	Call buttons and labels backlit
Operating temperature	-20°C to +50°C
Humidity	0-90% non condensing
IP rating	IP56
Surge protection	Yes

* NB: If 12V DC gate motor supply dips when motor starts up and the intercom is being used at the same time, the speech quality might be affected.

The POLOphone system is supplied as separate components:

- **Component 1-Entry panel (with two call buttons) consisting of:**



	2 X Mounting screws
	2 X Rawplugs
	1 X Mounting screw sealing washer
	1 X Cover retaining screw
	2 X Call button labels

- **Component 2-Handset consisting of:**



	2 X Mounting screws
	2 X Rawlplugs
	1 X Cover retaining screw
	1 X Telephone cord
	2 X Cable ties

- **POLOphone Extras**



Anti-knock shield

It provides greater protection for the entry panel against vandalism and may be mounted to a gooseneck or directly to a wall or pillar. It is fabricated from 304 grade stainless steel with a brushed finish and enhances the look of the entry panel.




Brushed finish anti-knock shield



Conduit box mounting plate

Simplify the installation where a conduit wall box has been provided for mounting the handset.

The 4" x 2" backing box conduit box mounting plate replaces the existing box plate and provides the necessary fixing points and cable entry hole allowing direct mounting of the handset cradle bracket to it.



Baseplate




PoloSwitch

This dual-function relay card connects to the **POLOphone** 2-wire bus. Depending on the switch setting on the relay card, the **PoloSwitch** functions either to make up an external ring extender for a particular group of handsets or it acts as a secure gate trigger for a particular entry panel.



PoloSwitch inside motor



14V DC Power Supply

Mains adapter (2 pin). Alternatively use auxiliary 12V supply from gate motor.

POWER SUPPLY & WIRING

Power Supply

The Polophone system operates off a 14V DC supply. The system is designed so that power can be connected to any one of the components in the system.

If the system is being installed with a gate operator that can provide at least a 12V DC 150mA supply, the entry panel can be connected directly to this unit.

! *NB: If the 12V DC gate motor supply dips when motors starts up and the intercom is being used at the same time, the speech quality might be affected.*

Alternatively if battery power is not available at the entry panel, CENTURION offers a 14V DC supply (mains adapter), (order ref: POLOP000V1) that plugs into a universal two pin 220V AC mains supply socket.

A DC jack is provided on the output of the adapter that plugs conveniently into the cradle of any one of the handsets in the system.

Terminals are provided on the cradle electronic module to terminate a 14V DC supply should the supply being used not have a jack compatible with the socket on the cradle.

If the bus voltage (between terminals "1" and "2") is lower than 8V DC, power needs to be applied at another unit in the system.

Wiring

The two wire bus of the Polophone system is polarised. If incorrectly connected the unit will not operate, but it will not be damaged.

The length of the bus is limited to a maximum of 150m.

! *NB: It might be necessary to double up on the thickness of the 2 wire bus depending on the distance between the entry panel and handsets in the system, and to which component the power supply is connected (handset or entry panel). Refer to page 5 for the cable thickness schedule.*

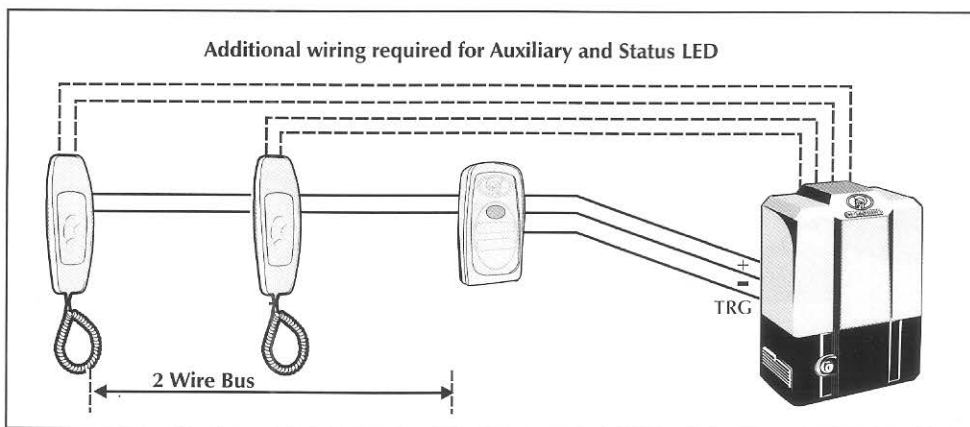


Fig 2 Wiring Requirements





LOCATION OF POWER SUPPLY	FROM COMPONENT	NUMBER OF WIRES	CABLE DISTANCE		TO COMPONENT	LOCATION OF POWER SUPPLY
			<100M	<150M		
PSU 14V DC		2 WIRES	0,2mm ²	0,4mm ²		
		2 WIRES	0,4mm ²	0,8mm ²		PSU 12V DC

Fig 3 Cable Thickness Schedule

Door Lock Drive

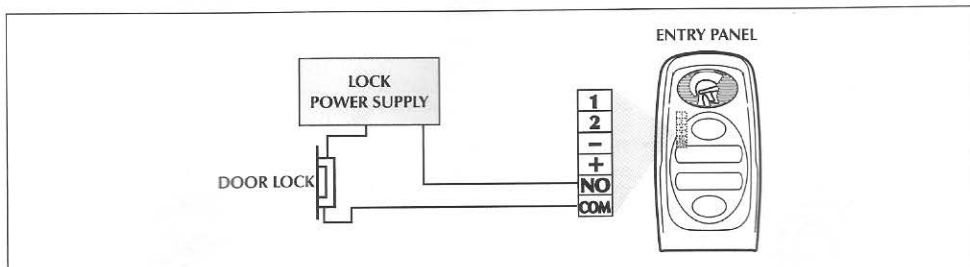


Fig 4 Door Lock Drive


Be Security Wize

How to prevent a would-be intruder from tampering with the wires between the entry panel and gate motor in order to trigger the gate.

Option 1: (Recommended solution)


BENEFIT:

Connect power to the POLOphone via the POLOswitch - no need to take battery power to the entry panel

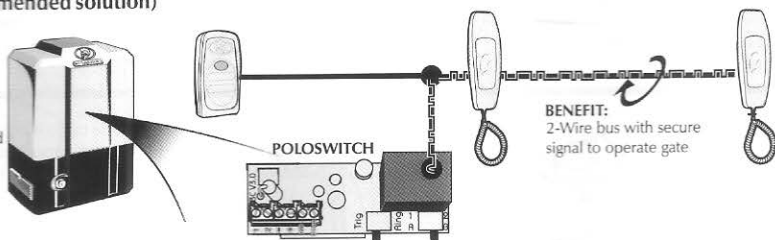


BENEFIT:
2-Wire bus with secure signal to operate gate

Option 2: (Cheaper solution)

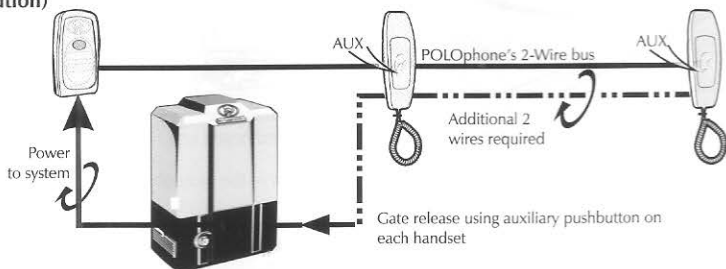


Gate release using auxiliary pushbutton on each handset

ENTRY PANEL INSTALLATION



Wall Mount Installation


- Position entry panel on wall adjacent to entrance gate or door.
- Mount at a height that allows speaking into the system to be comfortable.
- A recommended height is shown.




Gooseneck Installation

Alternatively mount the entry panel onto a gooseneck ensuring that:


- The entry panel does not protrude too far into the driveway.
- The entry panel is not set too far back and can be easily accessed from a vehicle.
- The height allows speaking into the system to be comfortable.




- Dimensions of the entry panel base and mounting holes relative to the entry panel cover.




- Lift off the outer cover of the entry panel.




- Insert screwdriver as shown and unclip the electronic module from base.



- Lift electronic module off base.




- In the case of an uneven wall, the tabs may be cut as shown to allow the base to 'sit' on the wall without Rocking.




- Hold the entry panel base against the wall at the required height ensuring that it is vertical.
- Mark the location of the mounting holes.
- Using a 6mm masonry bit, drill holes into the wall for the rawlplugs provided in the kit.

- If the cable is being routed into the unit from a concealed conduit behind the base, knock out one of the cable entry holes provided in the base and feed through the cable. Ensure that at least 100mm of cable extends out of the wall.
- Fit sealing washer (A) onto top mounting screw before installing.


ENTRY PANEL INSTALLATION




- Screw the base firmly into position and using the slots provided in the mounting holes, adjust the base to be perfectly vertical.




- (B) Ensure that sealing washer is fitted and closes off the mounting hole against water ingress.




- Hook the electronics module into the base as shown and clip back into position.




- Terminate cable onto electronics. Refer to wiring diagram (See page 10).




- If the cable is surface mounted, route the cable into the unit from underneath as shown and terminate onto the electronics. Refer to the wiring diagram (See page 10).



- Write call button labels, insert into lens(es) and clip lens(es) back onto chassis.




- Clip outer cover back into position.
! NB: It will be necessary when commissioning the unit to have the cover removed.




- Secure the cover using the fixing screw provided in kit.

HANDSET INSTALLATION


Handset Installation




- Position handset on wall where required and at a height that will allow for comfortable use of the handset. A height of 1550mm from the floor to the base of the cradle is recommended.




- To remove the cradle base, squeeze the sides of the cradle.




- Extract the cradle base.




- Outer dimensions of the mounting holes in the cradle base relative to the cradle base.




- In the case of an uneven wall, the tabs may be cut as shown to allow the cradle base to 'sit' on the wall without rocking.



- Hold the cradle base against the wall at the required height and ensure that it is vertical.
- Mark the location of the mounting holes.






- Screw the base firmly into position and using the slots provided in the mounting holes to adjust the base to be perfectly vertical.






- Route the cable over the channel in the cradle base cross bar and using the cable tie (A) - provided secure the cable to the cradle base as shown.

- Using a 6mm masonry bit, drill holes into the wall for the rawlplugs provided in the kit.
- If the cable is being routed into the unit from a concealed conduit behind the base, route the cable through the cable entry point provided.
- Ensure that at least 140mm of cable extends out of the wall.






- Tighten cable tie ensuring that there is sufficient slack to terminate the cable onto the electronics ($\pm 80\text{mm}$).
- Terminate cable onto electronics. Refer to wiring diagram (See page 10).
- If the cable is surface mounted, route the cable into the unit from underneath as shown. Secure to cradle base using cable tie provided. Allow sufficient slack ($\pm 80\text{mm}$).



- Terminate onto the electronics. Refer to the wiring diagram (See page 10)
 - Using a sharp knife carefully cut out the cable entry slot to allow the surface mounted cable to route into the cradle.
 - Clip the cradle back onto the base.
- !** NB: It will be necessary when commissioning the unit to have the cradle cover removed.




Wiring the status LED



- Clip the (A) long tail end of the telephone cord into the jack provided at the bottom of the cradle and similarly into the handpiece. Replace the handpiece onto the cradle.
- Connect the wires from the status LED on the gate motor to the terminals.
- Insert the wire from the LED drive in the gate motor into the terminal marked with a (*).
- Insert the wire from the COM/- from the gate motor into the terminal marked with a (\ominus).

HANDSET INSTALLATION




Handset Installation



- Position handset on wall where required and at a height that will allow for comfortable use of the handset. A height of 1550mm from the floor to the base of the cradle is recommended.

- To remove the cradle base, squeeze the sides of the cradle.



- Extract the cradle base.



- Outer dimensions of the mounting holes in the cradle base relative to the cradle base.

- In the case of an uneven wall, the tabs may be cut as shown to allow the cradle base to 'sit' on the wall without rocking.

- Hold the cradle base against the wall at the required height and ensure that it is vertical.
- Mark the location of the mounting holes.
- Using a 6mm masonry bit, drill holes into the wall for the rawlplugs provided in the kit.
- If the cable is being routed into the unit from a concealed conduit behind the base, route the cable through the cable entry point provided.
- Ensure that at least 140mm of cable extends out of the wall.



- Screw the base firmly into position and using the slots provided in the mounting holes to adjust the base to be perfectly vertical.

- Route the cable over the channel in the cradle base cross bar and using the cable tie (A) - provided secure the cable to the cradle base as shown.

Check Functions

- Press the gate/door release pushbutton on each handset and check that the gate/door adjacent each entry panel operates.
- At each handset press the pushbutton to call the handsets in the other group. Make sure that these handsets ring and that there is communication.
- At each handset check the operation of both the auxiliary pushbutton and the status LED if being used.
- Replace all covers.
- If doing the installation for a client it is recommend when handing over to explain carefully the operation and full functions of the system.

PROBLEM	POSSIBLE CAUSES & SOLUTIONS TO PROBLEM
<p>1 Lights off on Entry Panel</p>	<ul style="list-style-type: none"> • Check polarity of power supply wires. • Check polarity of 2 wire bus. • Check supply voltage. • Check 2 wire bus voltage at Entry Panel.
<p>2 Entry Panel howling when active</p>	<ul style="list-style-type: none"> • Reduce volume on Entry Panel.
<p>3 Entry Panel relay not triggering when gate button pressed on Handset</p>	<ul style="list-style-type: none"> • Check correct group (1 or 2) is selected on Entry Panel. • Check bus voltage at Entry Panel
<p>4 Handset not ringing when called</p>	<ul style="list-style-type: none"> • Check polarity of 2 wire bus. • Check 2 wire bus voltage at Handset. • Check coil cord connection. • Check that correct group (A or B) is selected on Handset.
<p>5 No speech when handset lifted</p>	<ul style="list-style-type: none"> • Increase volume on Handset. • Check coil cord connection to cradle. • Check hook switch is free to move.